

NOTES;

TPAR SHOULD BE KEPT FREE OF TRASH, SEDIMENT, AND DEBRIS.



RAILINGS OR OTHER OBJECTS MAY PROTRUDE A MAXIMUM OF 4" INTO THE WALKWAY CLEAR SPACE WHEN LOCATED A MINIMUM OF 27" ABOVE THE WALKWAY SURFACE.

USE CRASHWORTHY TEMPORARY BARRIERS WHEN USED AS A PEDESTRIAN CHANNELIZERS.


PLACE SIDEWALK BARRICADES ACROSS THE ENTIRE WIDTH OF THE WALKWAYSURFACE, WHEN USED.

USE INTERLOCKING DEVICES TO CHANNELIZE PEDESTRIAN FLOW TO PREVENT GAPS THAT COULD ALLOW PEDESTRIANS TO STRAY FROM THE CHANNELIZED PATH.

- ① PROVIDE DETECTABLE EDGE TO ANY TRIPPING HAZARD IN THE WALKWAY. LOCATE BALLAST BEHIND THE DETECTABLE EDGE OR INTEGRAL TO THE DEVICE. ANY SUPPORT ON THE FRONT OF THE DEVICE SHOULD NOT EXTEND INTO THE 48" MINIMUM WALKWAY CLEAR SPACE. ANY SUPPORT THAT EXTENDS INTO THE WALKWAY SHALL NOT EXCEED 1/2" HEIGHT ABOVE THE WALKWAY SURFACE; IF GREATER THAN 1/4", BEVEL AS SHOWN IN THE TRIP HAZARD DETAIL.
- ② PROVIDE CONTINUOUS DETECTABLE EDGES EXTENDING AT LEAST 6" ABOVE THE WALKWAY SURFACE. MARK DETECTABLE EDGES WITH A COLOR THAT CONTRASTS WITH THE WALKWAY SURFACE. PLACE THE DETECTABLE EDGE AROUND ANY PORTABLE SIGN STAND IN THE WALKWAY AREA WHERE THE SIGN POSES A HAZARD TO A VISUALLY-IMPAIRED PEDESTRIAN.
- ③ DEVICES AND DETECTABLE EDGES SHALL NOT BLOCK WATER DRAINAGE FROM THE WALKWAY. A GAP HEIGHT OR OPENING FROM THE WALKWAY SURFACE UP TO A MAXIMUM OF 2" IS ALLOWED FOR DRAINAGE PURPOSES.
- ④ USE HAND AND GUIDE RAILS WHEN REQUIRED. INSTALL TOP RAIL OR TOP SURFACE IN A VERTICAL PLANE PERPENDICULAR TO THE WALKWAY, ABOVE THE DETECTABLE EDGE. PROVIDE CONTINUOUS RAIL AT A HEIGHT OF 34" TO 38" ABOVE THE WALKWAY SURFACE. USE RAIL SUPPORTS THAT MINIMIZE CONTACT WITH PEDESTRIAN'S HANDS AND FINGERS. SEE "PUBLIC RIGHTS OF WAY ACCESSIBILITY GUIDELINES (PROWAG) 2005" FOR ADDITIONAL GUIDANCE ON USE OF HAND AND GUIDE RAILS.
- ⑤ USE DEVICES FREE OF SHARP OR ROUGH EDGES, AND USE ROUNDED FASTENERS (BOLTS) TO PREVENT HARM TO A PEDESTRIAN'S HANDS, ARMS, AND CLOTHING.
- ⑥ REGARDLESS OF WEATHER CONDITIONS PROVIDE FIRM, STABLE, FREE-DRAINING, AND NON-SLIP TEMPORARY WALKWAY SURFACES. TEMPORARY WALKWAY SURFACES SHALL ALLOW NORMAL USAGE OF WHEELCHAIRS, WALKERS, STROLLERS, OR OTHER MOBILITY DEVICES. CONCRETE, BITUMINOUS, STEEL, RUBBER, WOOD (3/4" OR THICKER), AND PLASTIC ARE ACCEPTABLE SURFACE MATERIALS FOR A TEMPORARY WALKWAY SURFACE. GRAVEL, MILLINGS, AND OTHER UNEVEN SURFACES ARE NOT ACCEPTABLE SURFACE MATERIALS.
- ⑦ PROVIDE 32" HIGH OR GREATER LONGITUDINAL CHANNELIZING DEVICES FOR PEDESTRIANS.
- ⑧ AN EDGE OF THE FRAMING MAY BE REMOVED IF IT IS NOT NEEDED FOR PEDESTRIAN GUIDANCE. STABILITY OF THE DETECTABLE EDGE SHOULD BE MAINTAINED.
- ⑨ TYPICAL. SEE SIGNING PLAN FOR DETAILS.

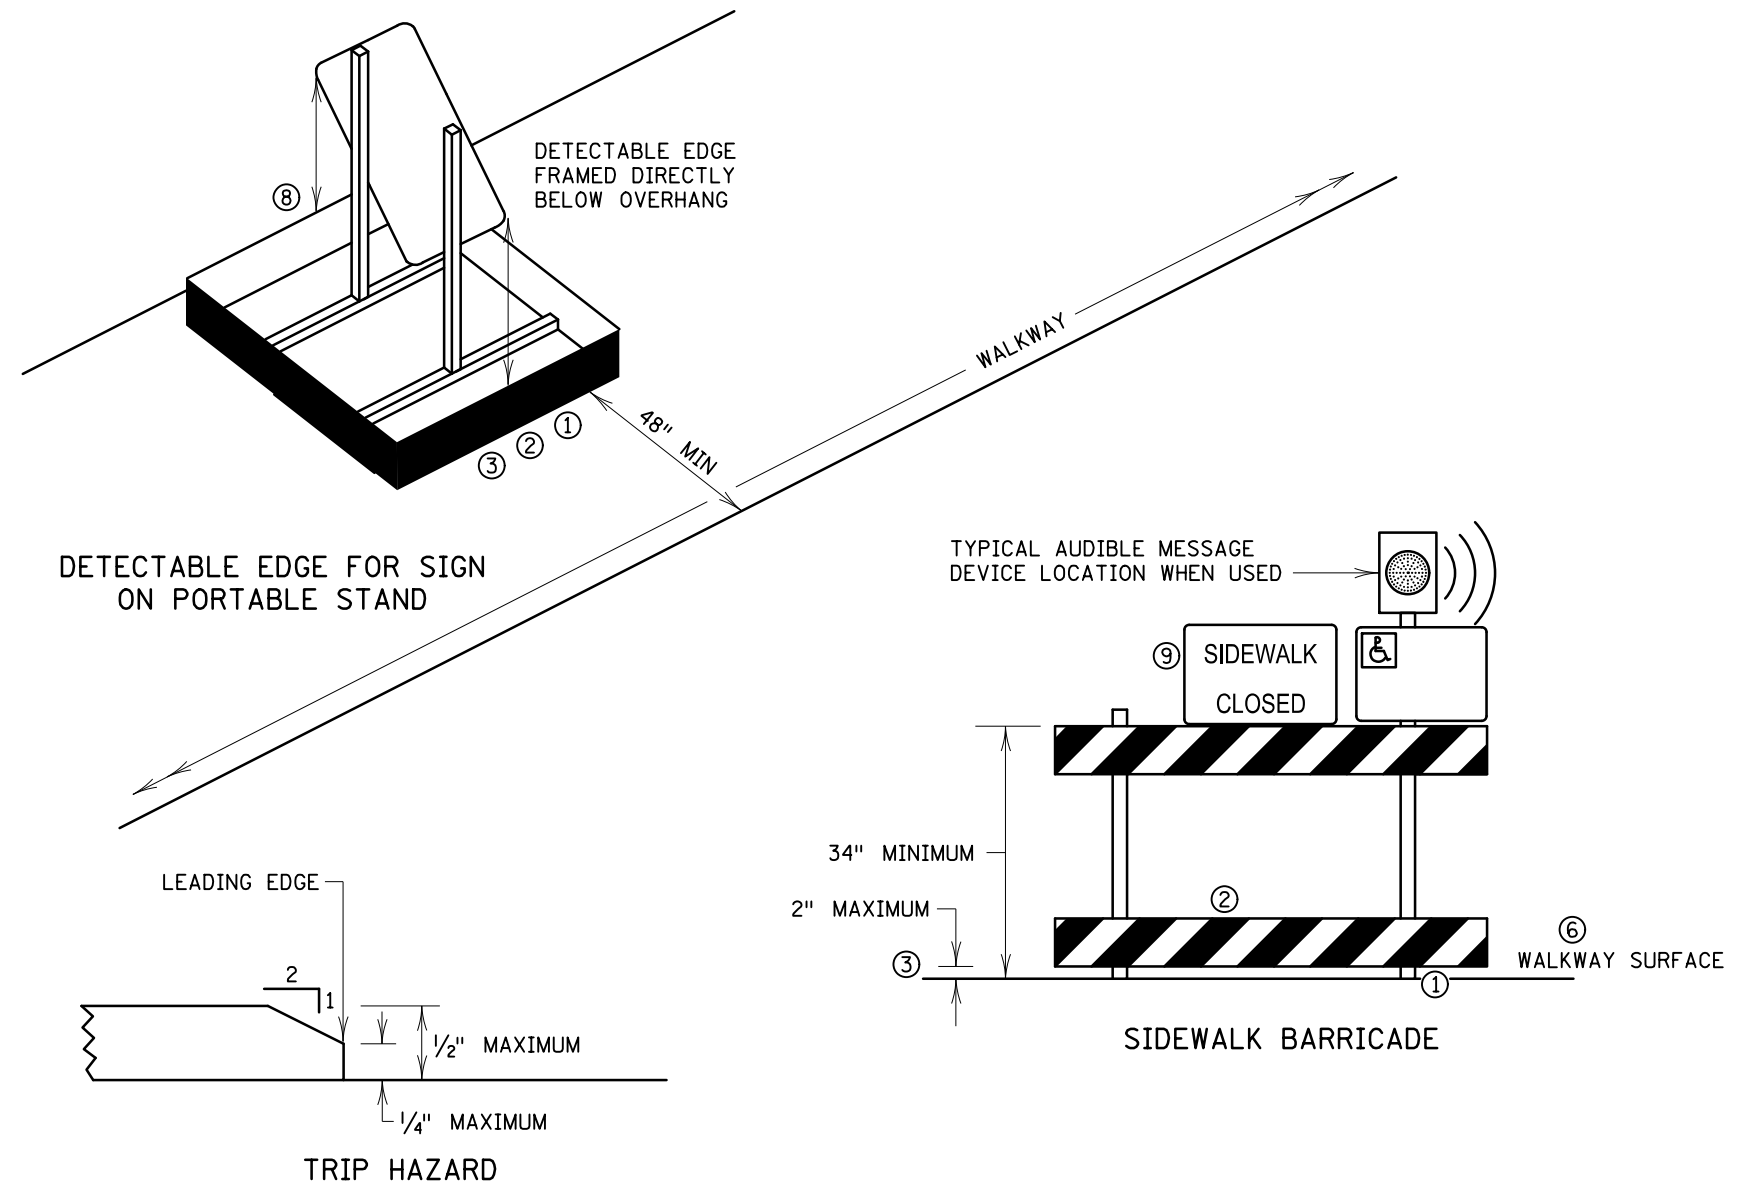

PEDESTRIAN CHANNELIZER DEVICE USING A PORTABLE CONCRETE BARRIER



PEDESTRIAN CHANNELIZER

REVISION:

APPROVED: 03-18-2021

Brian Subenson

BRIAN SUBENSON
STATE TRAFFIC ENGINEER

m
MINNESOTA
DEPARTMENT OF TRANSPORTATION

STANDARD PLAN 5-297.813 1 OF 2

Tom Styrbicki

THOMAS STYRBICKI
STATE DESIGN ENGINEER

APPROVED: 03-18-2021
REVISED:

STATE PROJ. NO.

TEMPORARY PEDESTRIAN ACCESS ROUTE (TPAR) DEVICES
CHANNELIZERS, SIDEWALK BARRICADES, AND PORTABLE STANDS



(TH) SHEET NO. OF SHEETS

NOTES:


CONSTRUCT SLOPES AS INDICATED OR FLATTER, BUT NOT STEEPER.

TPAR SHOULD BE KEPT FREE OF TRASH, SEDIMENT, AND DEBRIS.


- ① CONSTRUCT CURB RAMPS AT LEAST 48" WIDE WITH A FIRM, STABLE, AND SLIP-RESISTANT SURFACE.
- ② PLACE PROTECTIVE EDGING WITH A 2" MINIMUM HEIGHT WHEN A CURB RAMP OR LANDING PLATFORM HAS A VERTICAL DROP OF 6" OR GREATER OR HAS A SIDE APRON SLOPE STEEPER THAN 1V:3H. CONSIDER PROTECTIVE EDGING WHEN CURB RAMPS OR LANDING PLATFORMS HAVE A VERTICAL DROP OF 3" OR MORE.
- ③ PLACE DETECTABLE EDGING WITH 6" MINIMUM HEIGHT AND CONTRASTING COLOR ON ALL CURB RAMP LANDINGS WHERE THE WALKWAY CHANGES DIRECTION.
- ④ CONSTRUCT CURB RAMPS AND LANDINGS WITH A 2% OR FLATTER CROSS SLOPE.
- ⑤ PROVIDE A CLEAR SPACE OF AT LEAST 48" X 48" ABOVE AND BELOW THE CURB RAMP.
- ⑥ MARK THE CURB RAMP WALKWAY EDGE WITH A 2" TO 4" WIDE MARKING OF CONTRASTING COLOR. THE MARKING IS OPTIONAL WHERE COLOR-CONTRASTING EDGING IS USED.
- ⑦ DO NOT IMPEDE WATER FLOW IN THE GUTTER SYSTEM.
- ⑧ NO LATERAL JOINTS OR GAPS BETWEEN SURFACES SHALL EXCEED 1/2" WIDTH.
- ⑨ CHANGES BETWEEN SURFACE HEIGHTS SHALL NOT EXCEED 1/2". USE VERTICAL LATERAL EDGES UP TO 1/4" HIGH, AND BEVELED AT 1V:2H FOR LATERAL EDGES BETWEEN 1/4" AND 1/2" HEIGHT.
- ⑩ BEVEL THE EDGE OF TEMPORARY WALKWAY SURFACES 1/2" OR THINNER AT 1V:2H. FOR THICKER WALKWAY SURFACE BEVEL EDGE 1V:20H OR FLATTER.

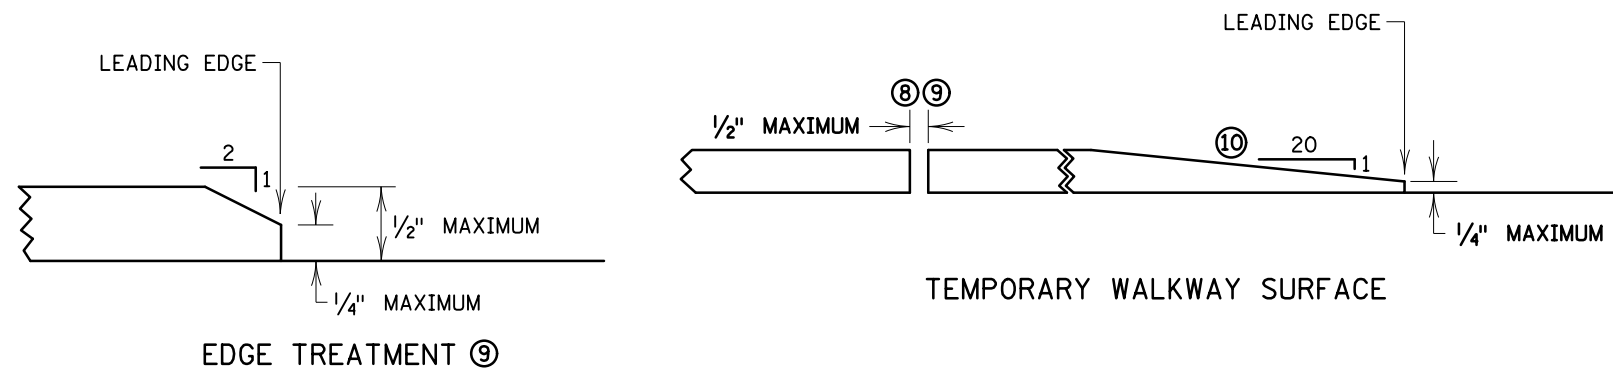

TEMPORARY CURB RAMP PERPENDICULAR TO CURB SHOWN WITH PROTECTIVE EDGE



TEMPORARY CURB RAMP PARALLEL TO CURB

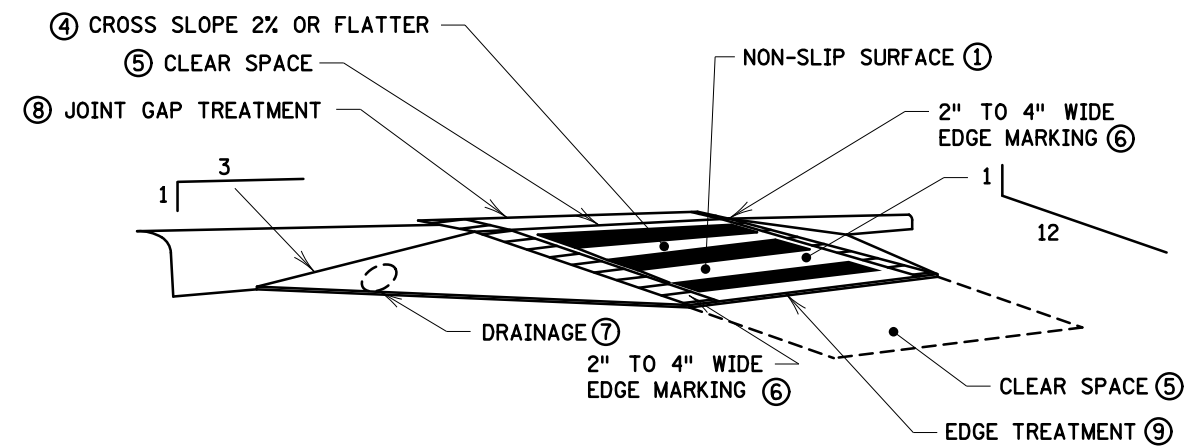

TEMPORARY CURB RAMP PERPENDICULAR TO CURB SHOWN WITH SIDE APRON

REVISION:
 APPROVED: 03-18-2021

 BRIAN SUBERSON
 STATE TRAFFIC ENGINEER

MINNESOTA
 DEPARTMENT
 OF
 TRANSPORTATION

STANDARD PLAN 5-297.813 2 OF 2

 THOMAS STYRBICKI
 STATE DESIGN ENGINEER
 APPROVED: 03-18-2021
 REVISED:
 STATE PROJ. NO.

TEMPORARY PEDESTRIAN ACCESS
 ROUTE (TPAR) DEVICES
 TEMPORARY CURB RAMPS AND WALKWAY SURFACES

(TH) SHEET NO. OF SHEETS