

Example - 5 Section Special Provision
November 17, 2021

Typically used phrases are highlighted.

Use corresponding MnDOT Standard Specifications number

Font: Calibri
Heading Font Size: 12 point
Body Font Size: 10 point

Match title to pay item

S-1 (2357) BITUMINOUS MATERIAL FOR SHOULDER TACK

S-1.1 DESCRIPTION

This Work consists of treating Aggregate Shoulders with bituminous material, in accordance with the provisions of MnDOT 2357.

Reference MnDOT Standard Specifications Number

S-1.2 MATERIALS

Use MnDOT Standard Specifications defined terms

- A Emulsified Asphalt..... MnDOT 3151
Use CSS-1 or CSS-1h diluted 1:1. Dilution of the emulsion is allowed only at the place of manufacture. No field dilution is allowed.
- B Water MnDOT 2130.2
- C Granular Material..... MnDOT 3149.2.J

Use tab stops to insert dots (see directions on page 2)

S-1.3 CONSTRUCTION REQUIREMENTS

Water shall be applied to the ground surface immediately in advance of placing the asphalt emulsion. The rate and quantity of water to be applied shall be as directed by the Engineer. In general, the soil shall be moistened to a depth of at least 1 inch. Application of water shall be in accordance with MnDOT 2130. The asphalt emulsion shall be applied at a rate of 0.18 – 0.25 gallons per square yard. During placement, take every effort to obtain uniform distribution over the area specified. Distributor spray bars shall be used to the fullest extent possible and handheld nozzles are to be used only in inaccessible areas.

Furnish and apply granular material on newly tacked surfaces at pedestrian crossings.

S-1.4 METHOD OF MEASUREMENT

The Engineer will measure the Bituminous Material for Shoulder Tack by volume at 60°F. The granular material for pedestrian crossings is included in bituminous material.

S-1.5 BASIS OF PAYMENT

The Contract Unit Price for Bituminous Material for Shoulder Tack is compensation in full for Equipment, Materials and labor required to complete the Work.

The Department will pay for Bituminous Material for Shoulder Tack on the basis of the following schedule:

Item No.	Item	Unit
2357.606	Bituminous Material for Shoulder Tack	gallon

List pay items in tabular form


Match Item Number, Item, and Unit to the Plan.
Be sure the pay items are active in AASHTOWare!

Example - 5 Section Special Provision


How to Insert Tab Stop Dots

1. From the Word document, select the line or paragraph to format.

2. From the Word Home tab, open the Paragraph dialog box

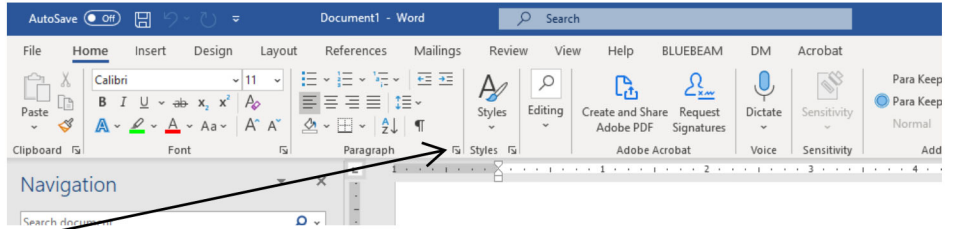

3. Open the Tabs... dialog box

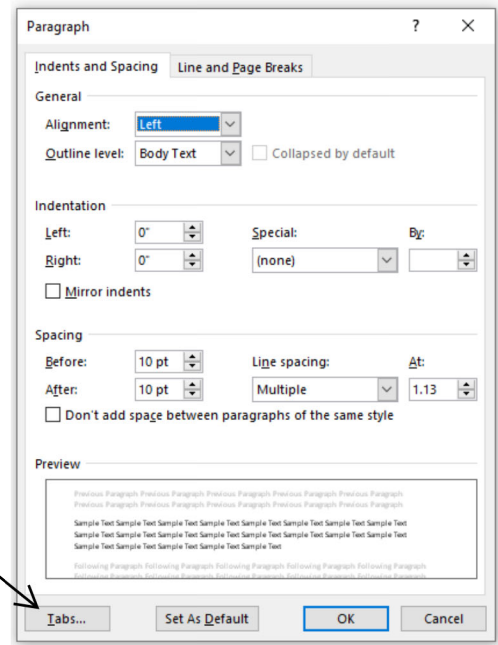

4. Select or add a tab stop at 6.5"
Select radio buttons:
Alignment - Right
Leader - 2.....
Select OK

