



Standard Highway Sign Border Specifications

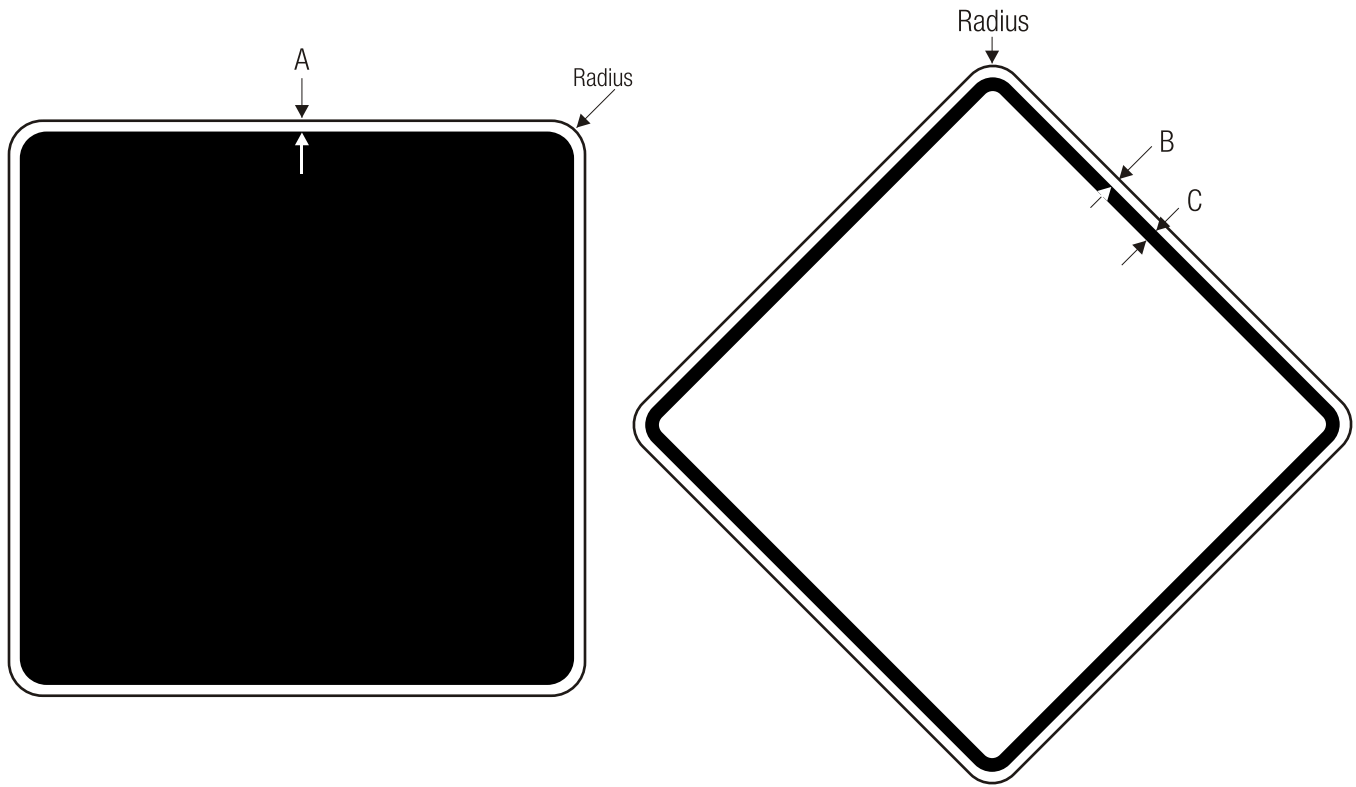

SIGN SIZE (inch)	EQUIVALENT (mm)	BORDER WIDTHS (inch)			RADIUS (inch)
		A	B	C	
9	225	.375	.375	.375	1
12	300	.375	.375	.438	1.5
18	450	.5	.375	.625	1.5
24	600	.5	.375	.625	1.5
30	750	.75	.5	.75	1.875
36	900	.75	.625	.875	2.25
48	1200	1	.75	1.25	3
60	1500	1	.75	1.25	3

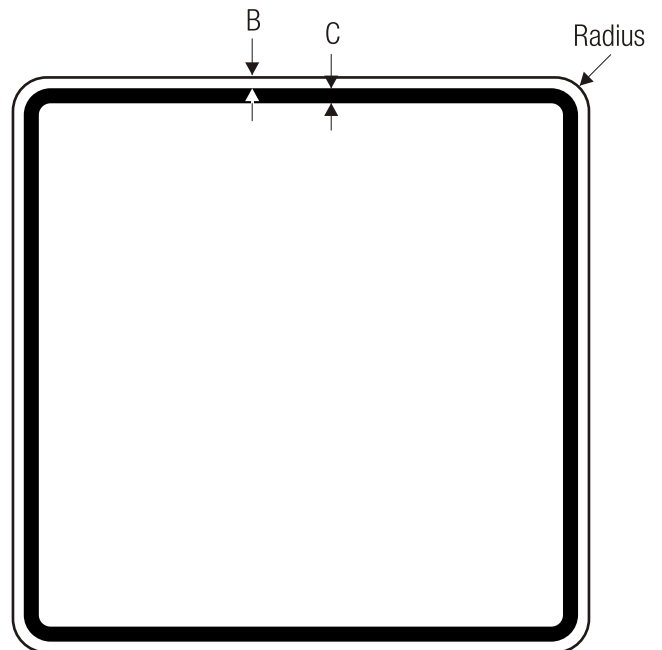

Minnesota Standard Signs and Markings Manual 2020

Standard Sign Details: Guide Sign Border and Radii

GUIDE SIGN BORDER AND RADII*

LENGTH OF SHORTEST SIDE	BORDER WIDTH	BORDER RADIUS
To and including 36"	1"	3"
42" - 60"	1.25"	6"
66" - 84"	1.5"	9"
90" and greater	2"	12"

*Exceptions for State Highway Signs:

1. A sign having 20" legend shall use a 3" border width and a border radius based on the above table.
2. 16" - 12" or 13.3" - 10" legend on Type "A" or Type "OH" signs shall use a 2" border width and a border radius based on the above table.