
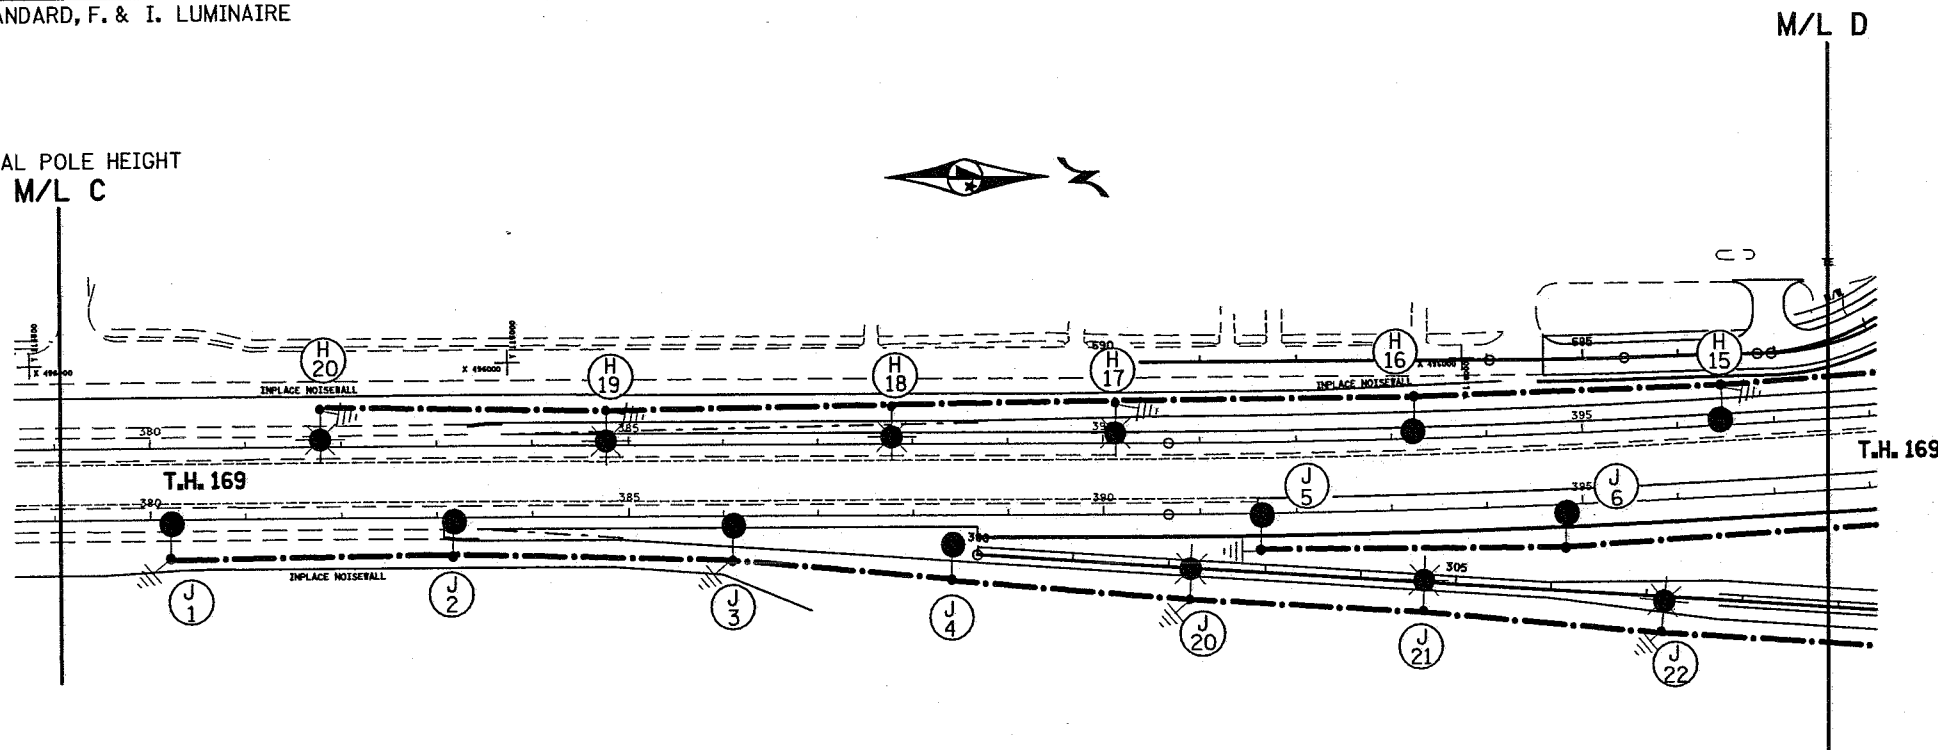


FEEDPOINT R5H

LIGHTING STANDARDS AND BASES

NO.	STATION	LT.	RT.	LOCATION	TYPE	WATTAGE
(2) (4)	1			T.H. 169 S.B.	9-49	400
(1)	2			T.H. 169 S.B.	9-49	400
(1)	3			T.H. 169 S.B.	9-49	400
(1)	4			T.H. 169 S.B.	9-49	400
(1)	5			T.H. 169 S.B.	9-49	400
(1)	6			N.W. RAMP	9-40	250
(1)	7			T.H. 169 S.B.	9-49	400
(1)	8			T.H. 169 S.B.	9-49	400
(1)	9			T.H. 169 S.B.	9-49	400
(1)	10			N.W. LOOP	9-49	400
(1)	11			T.H. 169 S.B.	9-49	400
(1)	12			T.H. 169 S.B.	L	250
(1)	13			T.H. 169 S.B.	L	250
(1)	14			T.H. 169 S.B.	9-49	400
(1)	15			T.H. 169 S.B.	9-49	400
(1)	16			T.H. 169 S.B.	9-49	400
(1)	17			T.H. 169 S.B.	9-49	400
(1)	18			T.H. 169 S.B.	9-49	400
(1)	19			T.H. 169 S.B.	9-49	400
(1)	20			T.H. 169 S.B.	9-49	400
(1)	21			N.W. RAMP	9-40	250
(1)	22			N.W. RAMP	9-40	250
(3) (5)	23			N.W. RAMP	6B-40	250
(3) (5)	24			N.W. RAMP	6B-40	250
(1)	25			N.W. RAMP	9-40	250
(1)	26			N.W. LOOP	9-40	250
(1)	27			N.W. LOOP	9-40	250
(1)	28			N.W. LOOP	9-40	250

- (1) INSTALL SALVAGED LIGHT STANDARD, F. & I. LUMINAIRE & LIGHT STANDARD BASE
- (2) F. & I. LUMINAIRE
- (3) ANCHORAGE BY OTHERS
- (4) RENUMBER LIGHT STANDARD
- (5) SEE SHEET NO. 130 FOR ACTUAL POLE HEIGHT

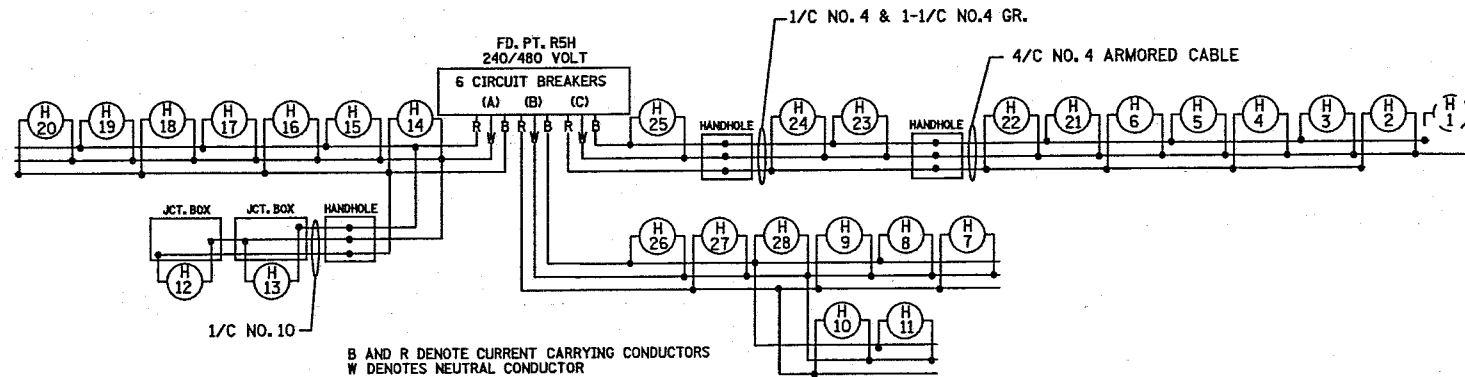


LIGHTING PLAN

SEE SHEET 134 FOR LEGEND


FEEDPOINT R5J

LIGHTING STANDARDS AND BASES						
NO.	STATION	LT.	RT.	LOCATION	TYPE	WATTAGE
(1)	1	380+15	-	T.H. 169 N.B.	9-49	400
(1)	2	383+15	-	T.H. 169 N.B.	9-49	400
(1)	3	386+10	-	T.H. 169 N.B.	9-49	400
(1)	4	388+35	-	T.H. 169 N.B.	9-49	400
(1)	5	391+60	-	T.H. 169 N.B.	9-49	400
(1)	6	394+80	-	T.H. 169 N.B.	9-49	400
(1)	7	398+00	-	T.H. 169 N.B.	9-49	400
	8	400+20	-	T.H. 169 N.B.	L	250
	9	400+80	-	T.H. 169 N.B.	L	250
(1)	10	402+15	-	T.H. 169 N.B.	9-49	400
(1)	11	405+25	-	T.H. 169 N.B.	9-49	400
(1)	12	408+40	-	T.H. 169 N.B.	9-49	400
(1)	13	411+55	-	T.H. 169 N.B.	9-49	400
(1)	14	414+15	-	T.H. 169 N.B.	9-49	400
(1)	15	417+25	-	T.H. 169 N.B.	9-49	400
(1)	16	419+95	-	T.H. 169 N.B.	9-49	400
(1)	17	422+70	-	T.H. 169 N.B.	9-49	400
(2) (4)	18	INPLACE	-	T.H. 169 N.B.	9-49	400
(2) (4)	19	INPLACE	-	T.H. 169 N.B.	9-49	400
	20	302+20	-	S.E. RAMP	9-40	250
	21	304+70	-	S.E. RAMP	9-40	250
	22	307+10	-	S.E. RAMP	9-40	250
	23	309+50	-	S.E. RAMP	9-40	250
	24	401+40	-	N.E. RAMP	9-40	250
(3)	25	403+80	-	N.E. RAMP	6B-40	250
(3)	26	406+20	-	N.E. RAMP	6B-40	250
	27	408+75	-	N.E. RAMP	9-40	250

- (1) INSTALL SALVAGED LIGHT STANDARD, F. & I. LUMINAIRE & LIGHT STANDARD BASE
- (2) F. & I. LUMINAIRE
- (3) ANCHORAGE BY OTHERS
- (4) RENUMBER LIGHT STANDARD

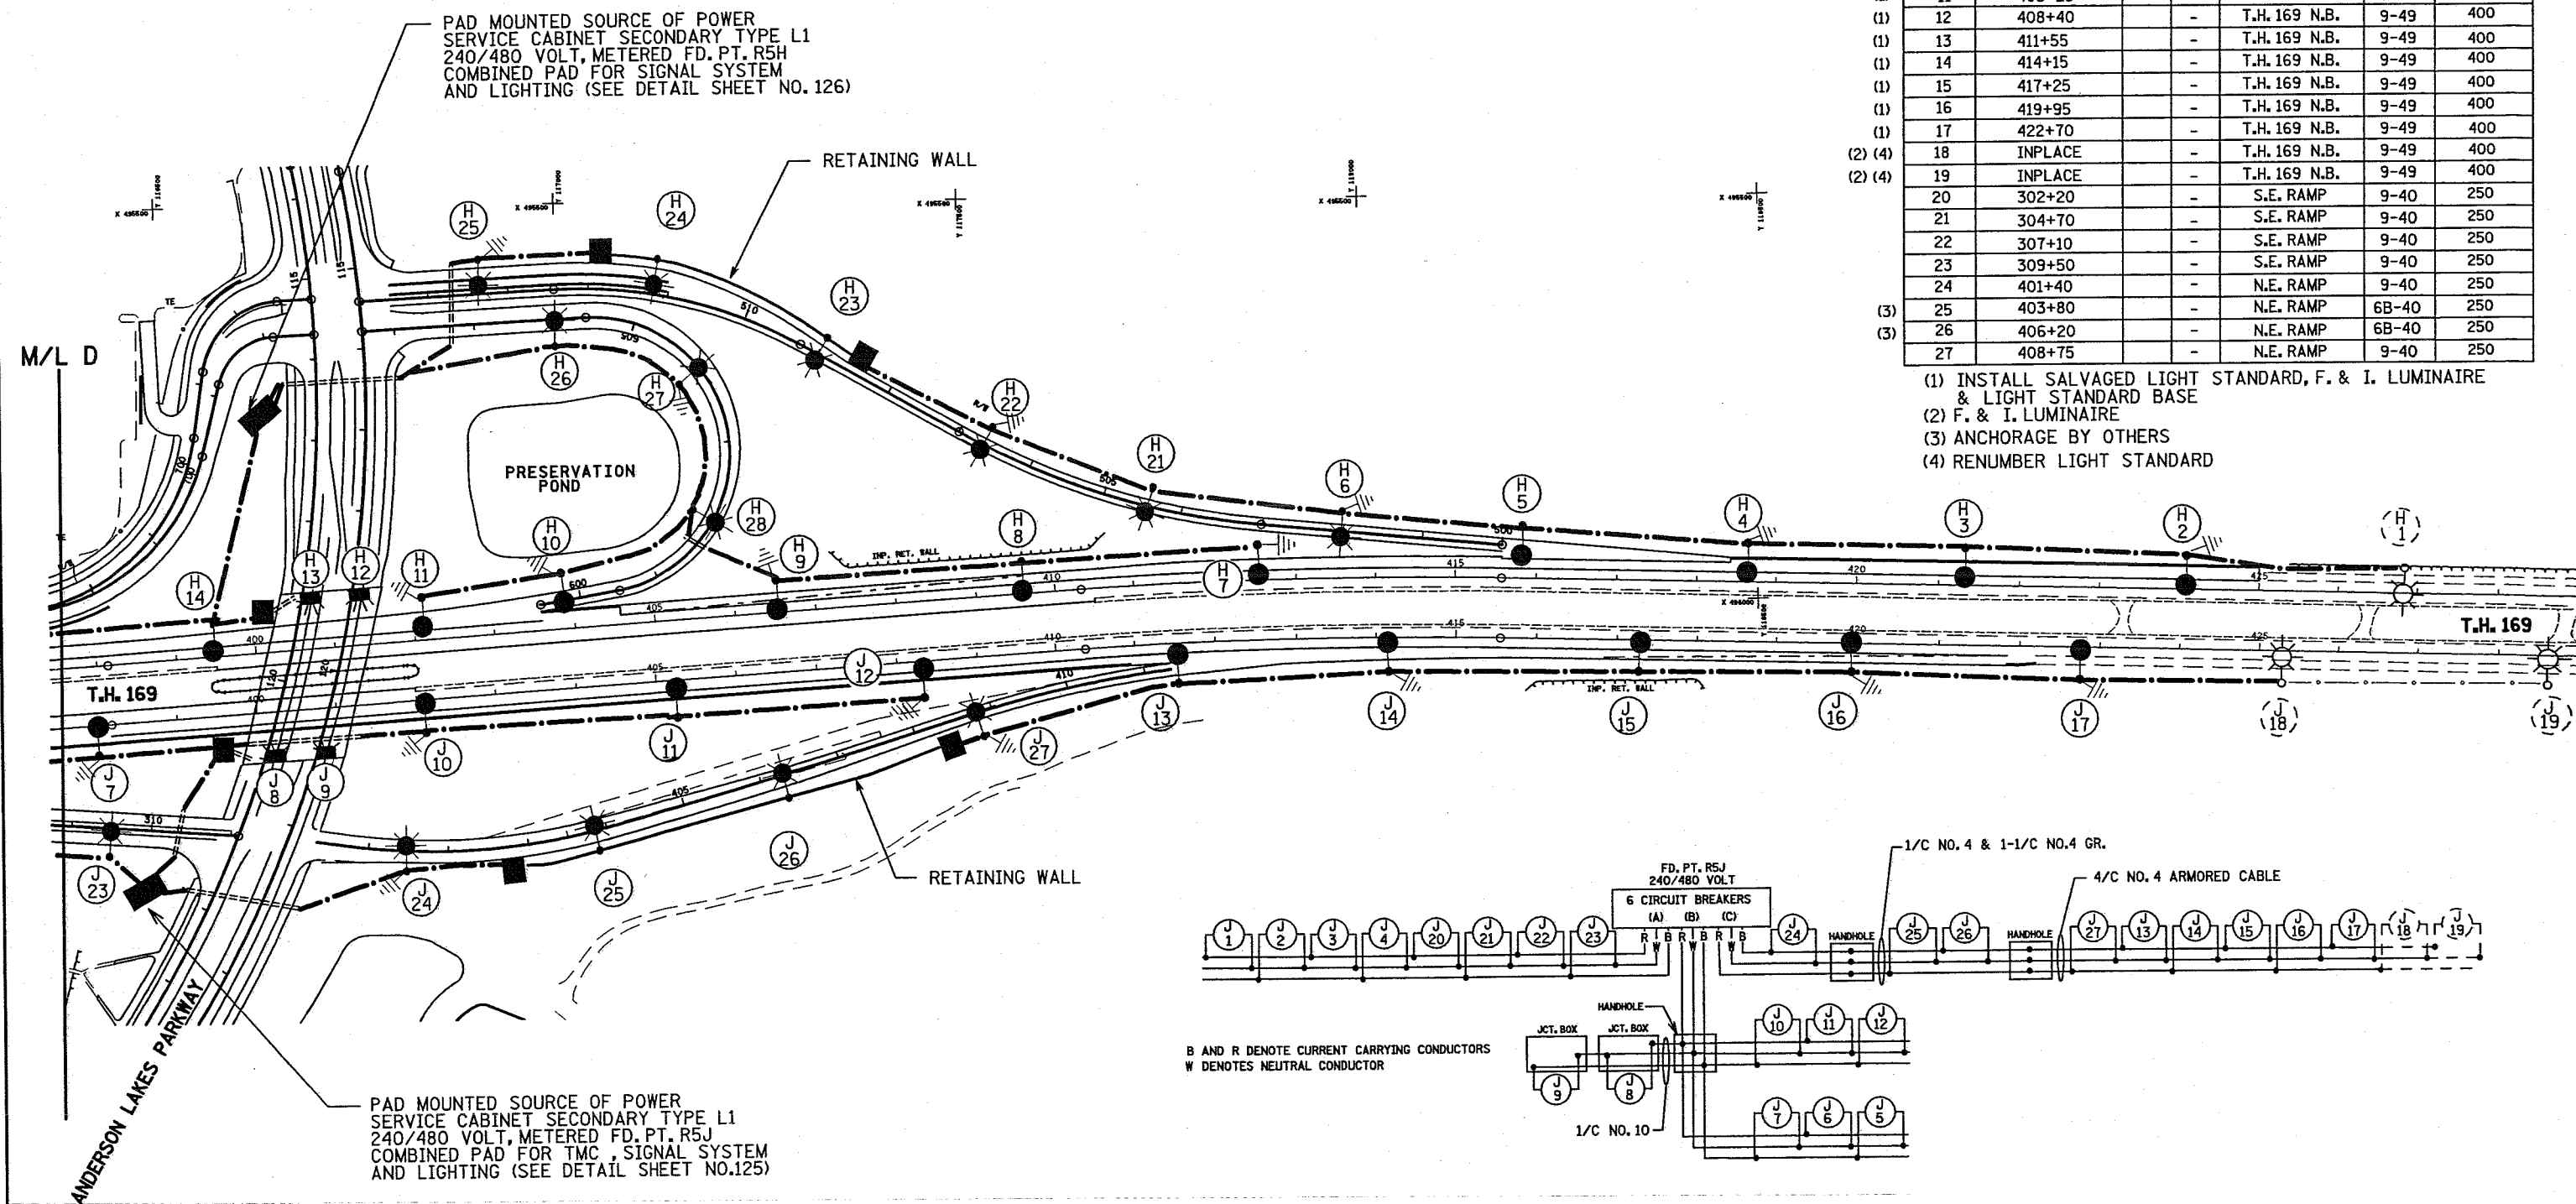

LIGHTING METER ADDRESS WEST RAMP: 9501 ANDERSON LAKES PKWY  
 LIGHTING METER ADDRESS EAST RAMP: 9230 BLOOMINGTON FERRY ROAD



CERTIFIED BY *John A. Kiewit*  
 LICENSED PROFESSIONAL ENGINEER

LIC. NO. 23084

State Proj. No. 2776-02 (T.H. 169) Sheet No. 138 of 300 Sheets

LIGHTING PLAN